

Explosion Proof I Series


LED Linear light



Model I2



Model I4



Materials

- ★ Housing: Die-casting aluminum
- ★ Diffuser: PC
- ★ Bolts: Stainless steel
- ★ Mounting Bracket: Stainless steel

Basic Data

Part Number	Wattage	CCT	Voltage Options	Lumens	Warranty	CRI	Emergency Time(Optional)
EX-20W I2YZDA	20	2200K-7000K	AC100-277V AC200-480V DC12-36V	2800	5 years	80	3 hours
EX-40W I2YZDA	40			5600			
EX-60W I2YZDA	60			8400			
EX-60W I4YZDA	60			8400			
EX-80W I4YZDA	80			11200			
EX-100W I4YZDA	100			14000			
EX-120W I4YZDA	120			16800			

"I2, I4"=Product code "Y"=D or N: Dimmable or Non-dimmable "Z"=CCT, from 2200~7000K.

"D"=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°. A for cover info., blank for flat cover, C spherical cover.

Explosion Protection

Marking ATEX	 II2 G Ex db op is IIB T4/T5 Gb II2 D Ex op is tb IIIC T135°C Db IP66
Marking IECEX	Ex db op is IIB T4/T5 Gb Ex op is tb IIIC T135°C Db IP66
Marking UL844 (North American)	Class I, Division 1, Groups C, D Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups F, G Class III
Marine Marking	UL1598A ABS
Other Rating	IP 66

Applications

Oil and Gas industry

- ★ All petroleum production and refining
- ★ Petroleum loading and transportation
- ★ Petroleum storage and retail
- ★ LNG industry
- ★ All mining operations and service

Chemical industry

- ★ All types of painting facilities
- ★ Chemical production and storage

Ocean, marine and aerospace field

- ★ Ocean platform operation facilities and structure
- ★ Aerospace clean room and production
- ★ Ocean vessel operations

Metal treatment

- ★ Steel and aluminum factories
- ★ Pumping stations in any environment
- ★ Metal smelting, foundry and manufacturing

Food and alcohol industry

- ★ Flour and fine particle production and storage
- ★ Food and distilling production
- ★ Alcohol industry

Other high humidity, dust, high temperature, vapor locations

Key Features


- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Adjustable mounting bracket(0-180 degree).

Value-Added Features

- Up to 5 years limited warranty option.
- Emergency Battery back up(Option) .
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make wider beam angle.
- Customized motion sensor(Option) .
- Advanced smart system: WIFI & BLUE-TOOTH(Option).


Mechanical Structure

Unit: mm or inch

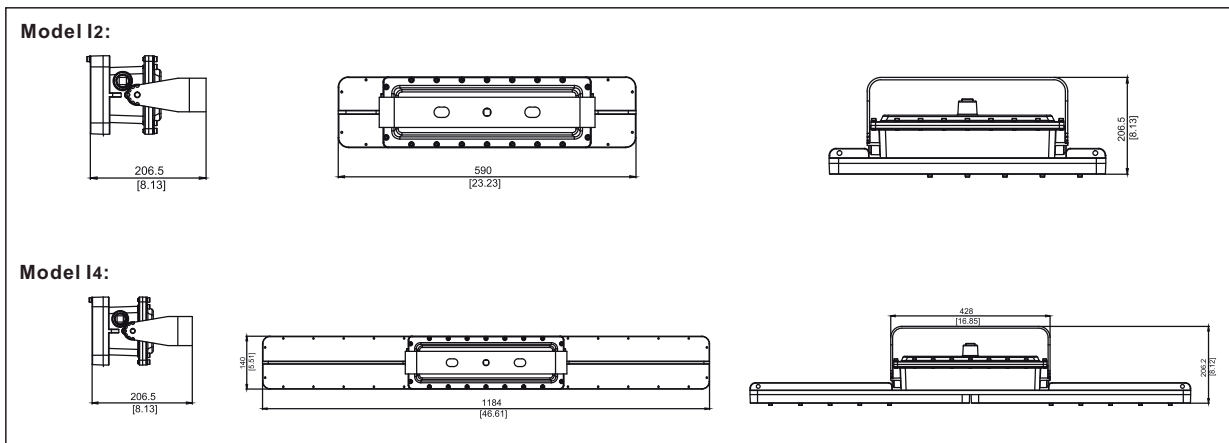

This structure type with bracket, flat glass and optical lens to generate 40°, 60°, 90° and 120° light distribution.

Lighting Distribution

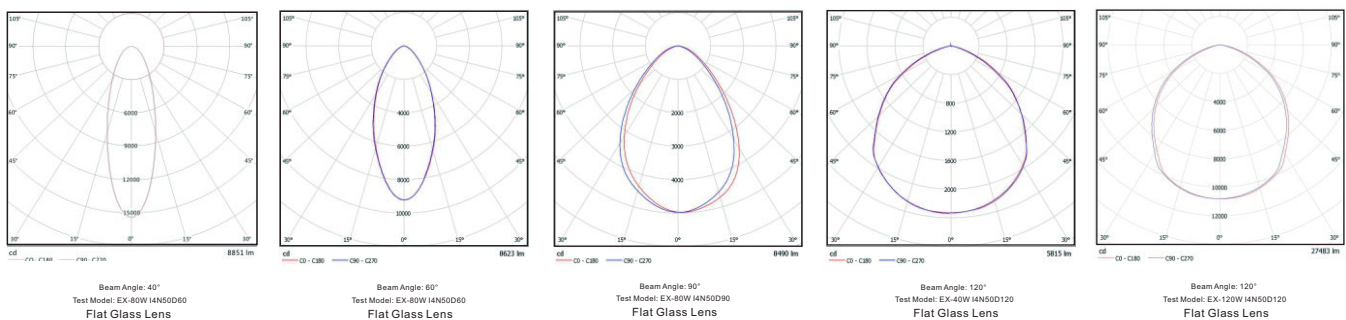

Installation Manual

WARNING

READ THIS INSTRUCTION CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTION FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

Warning: Risk of fire or electric shock. High bay Light installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.

Warning: Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off prior to install.

Warning: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.

Warning: DO NOT install in unstable, loose or breakable surfaces.


Warning: DO NOT let objects impact or exert force on the surface of the fixture.




WARNING
Risk of fire, Electric shock or personal injury
Before installation, turn off power!

Chain Mounting

Please turn off power before installation!

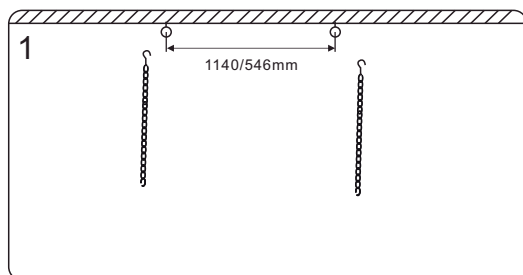


1. Drill 2x hole for hanging ring (1140mm for 4FT fixture or 546mm for 2FT fixture), and fixing them.

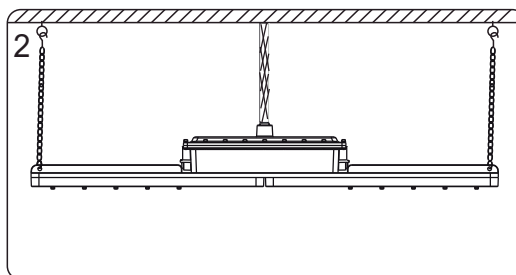


2. Fix the hanging chain to light fixture. Wire the cable through the metal conduit and then connect it with the power.

Pole Mounting

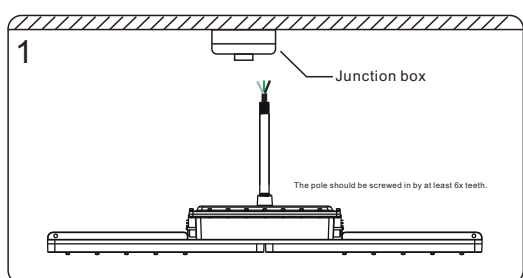


1. Wire the cable through the pole and then install the pole to the fixture.

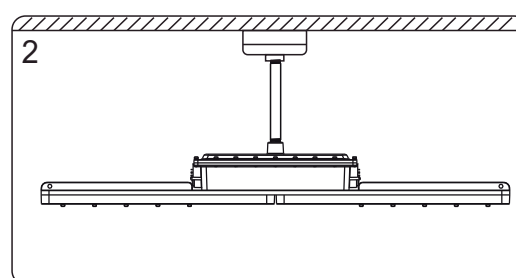


2. Wire the cable to enclosure of junction box and install the pole to junction box.

Bracket Mounting

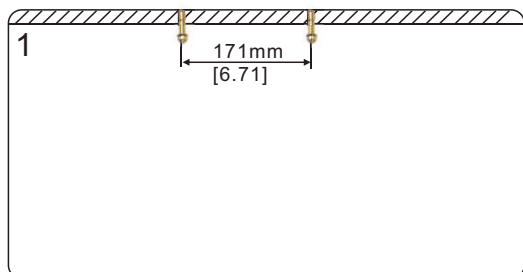


1. Drill 2x Ø15 holes for expanded screws, and fix them to the ceiling.

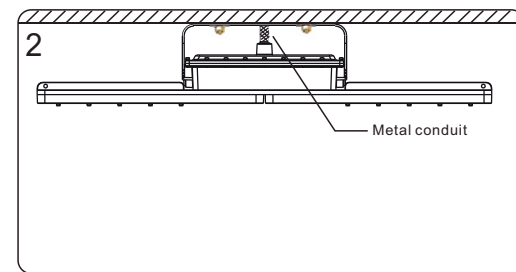


2. Install the fixture to the expanded screws, and tighten the nuts. (Metal conduit needs to be applied here)

Pole Bracket Mounting

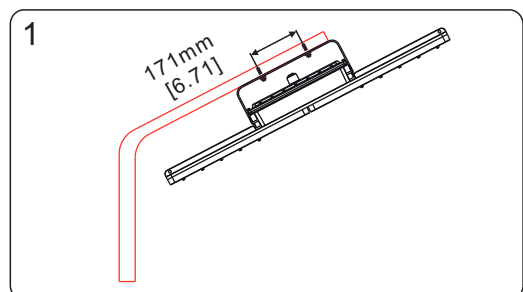

1. Drill 2x Ø15 holes for fixing screws.

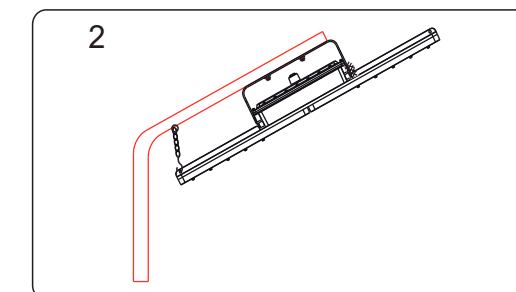


2. Fix the pendant chain and hook the fixture. Insert 2x Ø15 fixing screws and weld them on the pole bracket with the fixture.

Wall Mounting



1. Drill 2x Ø15 hole for expanded screws, and fix them to the wall. (Horizontal distance: 171mm)

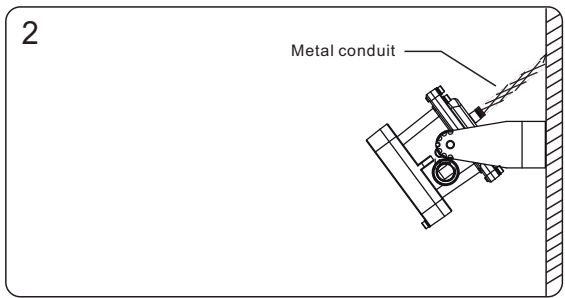

2. Install the fixture to wall and connect the wire to AC power. (Metal conduit needs to be applied here)

Packing Information

Model	Quantity/ Ctn	Length(cm)	Width (cm)	Height(cm)	Net weight(kg)	Gross weight (kg)
I2	1	77	34	26.5	12	14
I4	1	136	34	26.5	18.5	21.5

Accessories



● Model: Ex-Junction01
Name: Junction Box
Material: Aircraft Aluminum A383



● Model: EX-Hook
Name: Installation Hook
Material: Aircraft Aluminum A383



● Model: Ex-Conduit01
Name: Metal Conduit
Material: Stainless Steel and Aluminum



● Model: EX-WPipe
Name: Winding Swing Pipe
Material: Iron with Power Coating



● Model: EX-SPipe
Name: Winding Swing Pipe
Material: Iron with Power Coating



● Model: Ex-D01
Name: Pendant Direction Adapter
Material: Aircraft Aluminum A383



● Model: Ex-PCH
Name: Pendant Chain
Material: Stainless Steel S30400